



MARCIA 5366



**[REFRESHED
& IMPROVED]**

CHARACTERISTICS

- Quality: 98% cotton/2% carbon, 350 g/m²
- Flame retardant and antistatic
- Concealed press stud fastening
- Stand-up collar with Velcro fastening
- Adjustable sleeves and trouser legs with Velcro fastening
- Two chest pockets with flap and press stud fastening, two back pockets with flap and press stud fastening and two inside pockets with Velcro fastening
- Knee pockets on the inside (knee pads available separately, item no. 2.12.358.02)
- Adjustable tunnel elastic
- Flame-retardant reflective striping

Article number: 2.15.366.00

CHANGES COMPARED TO THE OLD MODEL:

- Improved fit
- Stand-up collar instead of 'flat' collar
- Replace snaps with Velcro for a better seal and fit
- Uniform sizing

SUITABLE FOR ACTIVITIES IN E.G.

- Petrochemistry
- Offshore
- Metal
- Shipbuilding
- Transport & logistics
- Industry

COLOUR

Orange

SIZES

46 to 62

PACKAGING

- 1 piece per polybag
- 12 pieces per outer box

EN ISO 11612:2015



A1 A2 B1 C1 E1

EN ISO 11611:2015



A1 A2 Class 1

EN 1149-5:2018




CE

EN ISO 13688:2013+A1:2021

PRODUCT INFORMATION

SIZE	ARTICLE NUMBER	EAN-CODE 1 PIECE (POLYBAG)	EAN-CODE 12 PIECES (OUTER BOX)
46	2.15.366.46	8718249046537	8718249046544
48	2.15.366.48	8718249046551	8718249046568
50	2.15.366.50	8718249046575	8718249046582
52	2.15.366.52	8718249046599	8718249046605
54	2.15.366.54	8718249046612	8718249046629
56	2.15.366.56	8718249046636	8718249046643
58	2.15.366.58	8718249046650	8718249046667
60	2.15.366.60	8718249046674	8718249046681
62	2.15.366.62	8718249046698	8718249046704

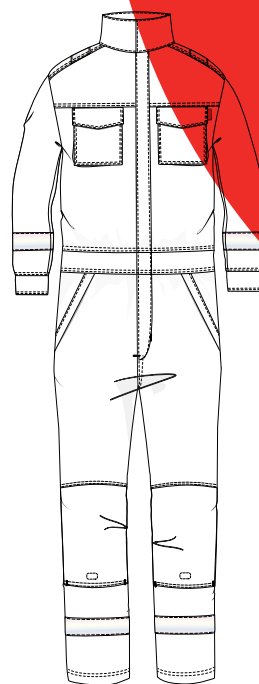

WASHING INSTRUCTIONS



CLARIFICATION OF PICTOGRAMS

EN ISO 11612:2015



A1 A2 B1 C1 E1

Protective clothing against heat and flames

A1: Exterior material tested for limited flame spread in accordance with EN ISO 15025:2016 procedure A

A2: Exterior material tested for limited flame spread in accordance with EN ISO 15025:2016 procedure B

B: Protection against convective heat (3 levels, 1 being the lowest)

C: Protection against radiant heat (4 levels, 1 being the lowest)

E: Protection against molten iron splash (3 levels, 1 being the lowest)

EN ISO 11611:2015



A1 A2 Class 1

Protective clothing for use during welding and related processes

Class 1 (lowest level): less hazardous welding situations

A1: exterior material tested for limited flame spread in accordance with EN ISO 15025:2016 procedure A

A2: exterior material tested for limited flame spread in accordance with EN ISO 15025:2016 procedure B

EN 1149-5:2018



Protective clothing with electrostatic properties

The EN 1149-5:2018 standard specifies the electrostatic requirements for electrostatic dissipative protective clothing to avoid incendiary discharges.

STORAGE CONDITIONS

The clothing should be kept in a clean, cool and dry place and not kept compressed in its original packaging. Do not expose the clothing to direct sunlight. Never store the clothing wet, always hang it to dry first. Make sure that the packaging and the garment are not damaged during shipping.

TESTING INSTITUTE

This clothing is certified by: AITEX (0161), Plaza Emilio Sala, 1 Alcoy (Alicante) 965542200, Spain.

DECLARATION OF CONFORMITY

For a copy of the declaration of conformity, we refer you to the following link: www.oxxa.work/doc

YOUR SUPPLIER:

RELATED PRODUCTS



MALIA 2320

Art. no. 2.15.320.00



MILTON 2383

Art. no. 6.32.383.00



ELIDA 2358

Art. no. 2.12.358.02